


Customer	Project	Page 1 / 1
Customer no.	Project no.	
Contact	Position no.	Date 2013-12-04
Care of	Location	

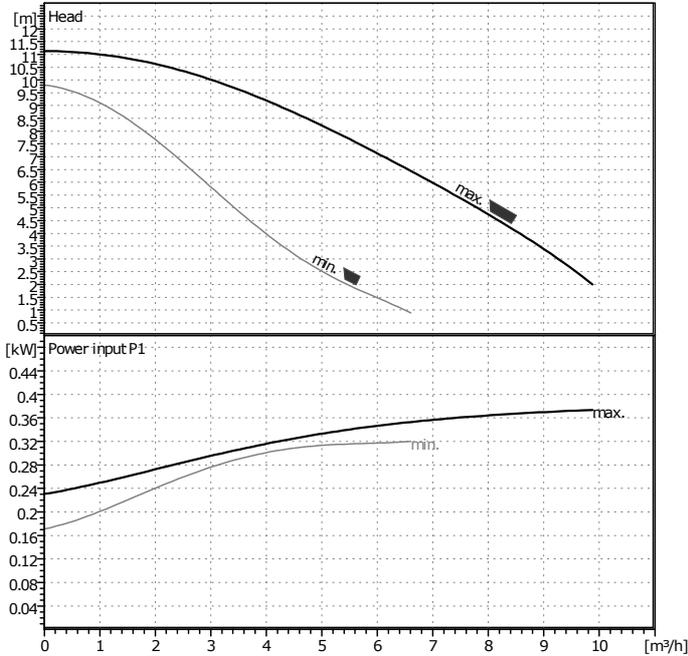

Requested data

Flow	0	m ³ /h
Head	0	m
Fluid	Water, pure	
Fluid temperature	20	°C
Density	0.9983	kg/dm ³
Kinematic viscosity	1.005	mm ² /s
Vapor pressure	0.02337	bar

Pump data


Make	WILO
Type	TOP-STG 30/10 1~ PN 10
Pumpe type	Single head pump
Pressure rating	PN10
Min. fluid temperature	-20 °C
Max. fluid temperature	110 °C

Hydraulic data (duty point)

Flow	m ³ /h
Head	m
Power input P1	kW
Speed	2600 1/min

Minimum suction head

Temperature	50	95	110	°C
Minimum suction head	0.5	5	11	m

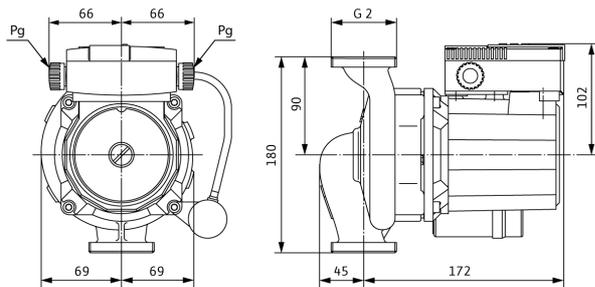

Materials / Shaft seal

Housing	EN-GJL-200
Shaft	X 46 Cr 13
Impeller	Fiber-reinforced PP
Bearing	Metal impregnated carbon


Dimensions per pump

		mm			

Suction side	1 1/4" / G 2	/ PN 10
Discharge side	1 1/4" / G 2	/ PN 10
Weight	6.3	kg

Motordata per Motor/Pump/

Rated power P2	0.18	kW
Power input P1	0.39	kW
Nominal speed	2700	1/min
Rated voltage	1~230 V, 50	Hz
Max. current	1.9	A
Degree of protection	IP X4D	
Permitted voltage tolerance	+/- 10%	

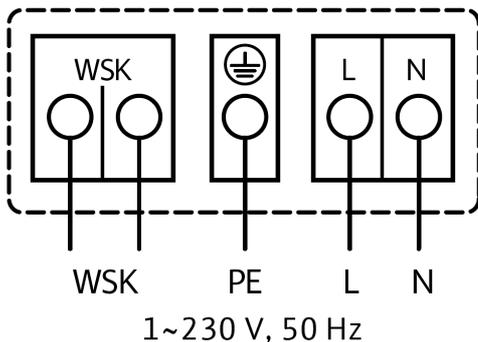

Item no. of standard version	2131676
------------------------------	---------