

Phone
Fax

TOP-S 65/7 3~ PN 6/10
System: Standard pump

WILO

Customer

Project

Customer no.

Project no.

Contact

Position no.


Care of

Location

Date

2013-12-04

Page 1 / 1

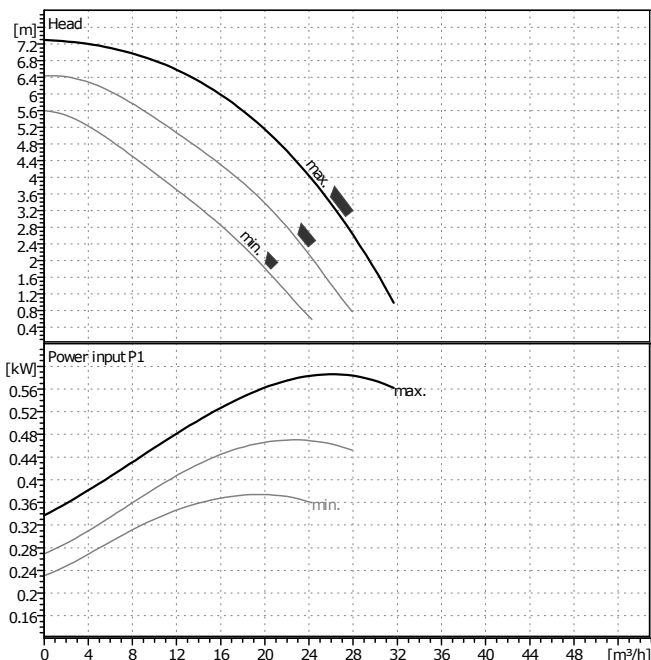

Requested data

Flow	0	m³/h
Head	0	m
Fluid	Water, pure	
Fluid temperature	20	°C
Density	0.9983	kg/dm³
Kinematic viscosity	1.005	mm²/s
Vapor pressure	0.02337	bar

Pump data

Make	WILO
Type	TOP-S 65/7 3~ PN 6/10
Pumpe type	Single head pump
Pressure rating	PN10
Min. fluid temperature	-20 °C
Max. fluid temperature	130 °C

Hydraulic data (duty point)

Flow	m³/h
Head	m
Power input P1	kW
Speed	2700 1/min

Minimum suction head

Temperature	50	95	110	130	°C
Minimum suction head	3	10	16	29	m

Materials / Shaft seal

Housing	Cast iron
Shaft	X 46 Cr 13
Impeller	Fiber-reinforced PP
Bearing	Metal impregnated carbon

Dimensions per pump

mm							
a1	234	b3	124	l2	109	dL2	19
a2	74	b4	66	n	4	kL1	130
a3	97	b5	66	d	118	kL2	145
b1	111	l0	280	D	185	Pg	2 x 13,5
b2	86	l1	140	dL1	14		

Suction side	DN 65	/ PN 6/10
Discharge side	DN 65	/ PN 6/10
Weight	20	kg

Motordata per Motor/Pump/

Energy efficiency class	C	
Rated power P2	0.35	kW
Power input P1	0.55	kW
Nominal speed	2800	1/min
Rated voltage	3~400 V, 50	Hz
Max. current	1.16	A
Degree of protection	IP X4D	
Permitted voltage tolerance	+/- 10%	

Item no. of standard version 2080057

